

# ABA Mini



A nut-and-bolt hose clamp with rolled band edges that is ideally suited for small, thin-walled hoses.


Socket or Screwdriver Adjustable | 9mm Band Width | SAE Standard J1508 Type FE | Diameter Range 6.5mm – 18mm

### MINI S10 (W1)

Zinc-Plated Combi-Slot Hex Head Screw  
9mm Band Width  
Clamp Secured Nut

### MINI S40 (W4)

304 Stainless Steel Phillips Hex Head Screw  
9mm Band Width  
Clamp Secured Nut

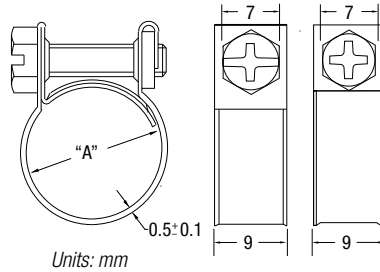

Units: mm



Band Width		MINI S10 (W1)		inches		mm (A)	
inches	mm	Brand PN	Global PN	min	max	min	max
3/8	9	21007	0810 6101 007	1/4	5/16	6.5	7.5
3/8	9	21008	0810 6101 008	9/32	11/32	7	8.5
3/8	9	21009	0810 6101 009	5/16	3/8	8	9.5
3/8	9	21010	0810 6101 010	3/8	13/32	9	10.5
3/8	9	21011	0810 6101 011	3/8	7/16	9.5	11.5
3/8	9	21012	0810 6101 012	13/32	1/2	10.5	12.5
3/8	9	21013	0810 6101 013	7/16	17/32	11.5	13.5
3/8	9	21014	0810 6101 014	1/2	9/16	12.5	14.5
3/8	9	21015	0810 6101 015	17/32	5/8	13.5	15.5
3/8	9	21016	0810 6101 016	9/16	21/32	14	16.5
3/8	9	21017	0810 6101 017	19/32	11/16	15	17.5

MINI S40 (W4)		inches		mm (A)	
Brand PN	Global PN	min	max	min	max
22008	0810 3002 008	5/16	11/32	7.5	8.5
22009	0810 3002 009	11/32	3/8	8.5	9.5
22010	0810 3002 010	3/8	7/16	9.5	11
22011	0810 3002 011	13/32	15/32	10.5	12
22012	0810 3002 012	7/16	1/2	11.5	13
22013	0810 3002 013	1/2	21/32	12.5	14
22014	0810 3002 014	17/32	19/32	13.5	15
22015	0810 3002 015	9/16	5/8	14.5	16
22016	0810 3002 016	19/32	21/32	15	17
22017	0810 3002 017	.63	23/32	16	18

