

Coupler




Pre-assembled sealing performance and superior clamp load capacity without pipe overlap.

For Butt Joint Style Connections | 15mm Max Gap Allows 33.5–44mm Insertions per Pipe | Diameter Range 1 3/4 – 3 1/2"

409 SS COUPLER

All 409 Stainless Steel
9/16" Fastener Drive
3 7/16" Band Width
Diameter Range 1 3/4" – 3 1/2"

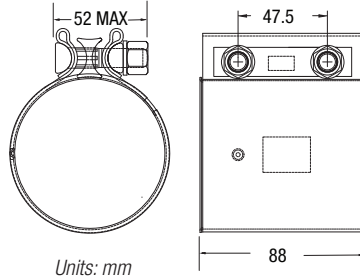

409 SS COUPLER		Nominal Joint Diameter (Pipe O.D.)	
Brand PN	Global PN	inches	mm
96-0125	0367 0000 058	2 1/4	57
96-0115	0367 0001 064	2 1/2	63
96-0159	0367 0000 070	2 3/4	69
96-0131	0367 0002 076	3	76
96-0158	0367 0001 089	3 1/2	90

Note: Additional sizes are available to meet specific application requirements.

55 Wide DPF Coupler




Large Diameter Diesel Particulate Filter (DPF) clamp creates a reliable joint seal between separate sections of DPF.

For Butt Joint Style Connections | Tall Hardware for Socket Clearance | Low Profile for Tight Packaging Space | Diameter Ranges 10 9/16" – 13 9/16"

55 WIDE DPF COUPLER

409 and 441 Stainless Steel
10mm Max Gap Allows 22.5-27.5mm Insertions
Gasket Available for Lowest Leak Rate



55 WIDE DPF COUPLER		Material	Gasket	Nominal Joint Diameter (Pipe O.D.)	
Brand PN	Global PN			inches	mm
96-0239	0367 0000 269	409 SS	Yes	10 9/16	267.6
–	0367 0000 301	441 SS	No	11 13/16	300.75
96-0261	0367 0000 345	441 SS	No	13 9/16	345.2