

# DuraSeal®




Clamp for thicker exhaust pipes or large pipe gap applications.

For Lap-Style Joint Connections | Reaction Block Technology | One Torque Point | Pre-Assembled For Easy Installation | Diameter Range 2" – 5"

**HEX SCREW DURASEAL**  
Hex Screw  
409 SS Band

**OVAL BOLT DURASEAL**  
Oval Bolt and Flange Nut  
304 SS Band

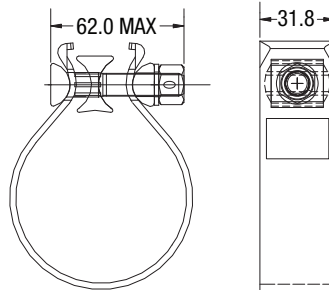

Units: mm




HEX SCREW DURASEAL		Band Material	Nominal Joint Diameter	
Brand PN	Global PN		inches	mm
94-0051	0371 0001 056	409 Stainless Steel	2	50.8
94-0052	0371 0001 062	409 Stainless Steel	2 1/4	57.2
94-0053	0371 0003 068	409 Stainless Steel	2 1/2	63.5
94-0054	0371 0003 075	409 Stainless Steel	2 3/4	69.85
94-0055	0371 0004 081	409 Stainless Steel	3	76.2
94-0056	0371 0000 093	409 Stainless Steel	3 1/2	88.9
94-0057	0371 0001 107	409 Stainless Steel	4	101.6
94-0050	0371 0000 132	409 Stainless Steel	5	127.0

OVAL BOLT DURASEAL		Band Material	Nominal Joint Diameter	
Brand PN	Global PN		inches	mm
94-0060	0371 0004 068	304 Stainless Steel	2 1/2	63.5
94-0061	0371 0004 075	304 Stainless Steel	2 3/4	69.9
94-0062	0371 0005 081	304 Stainless Steel	3	76.2
94-0071	0371 0003 107	304 Stainless Steel	4	101.6
94-0080	0371 0000 126	304 Stainless Steel	5	127.0

Note: DuraSeal® connections require 'sized' and slotted pipe. Torca recommends the Torca Seal-Slot design (see below).  
Note: Additional sizes are available to meet specific application requirements.

## Torca Seal-Slot Lap-Style Joint Connection

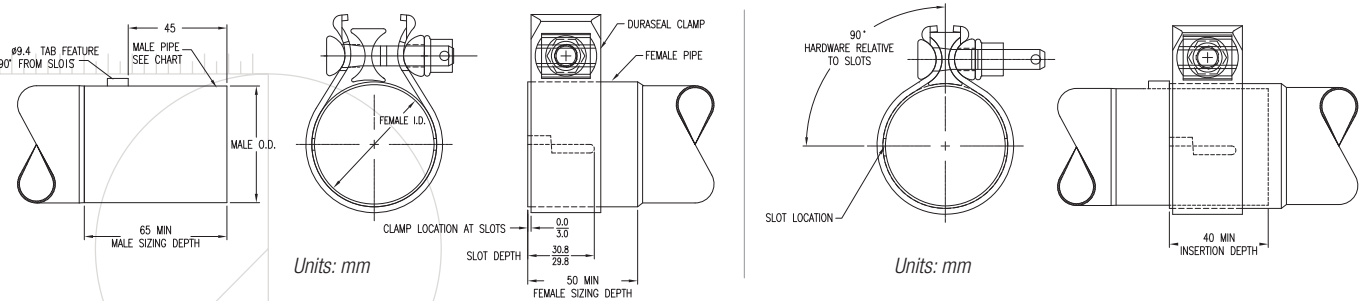

Units: mm

Units: mm