

EasySeal®



Service-specific sealing solution that does not require the use of slotted pipe ends.


For Lap and Butt Style Joint Connections | Unique Sealing Performance | Easy, Fast Accurate Installation | 304 Stainless Steel | Diameter Range 2" – 8"

EASYSEAL

Pre-Attached Hardware
High-Strength Grade-8 Fasteners
304 Stainless Steel Band



Units: mm

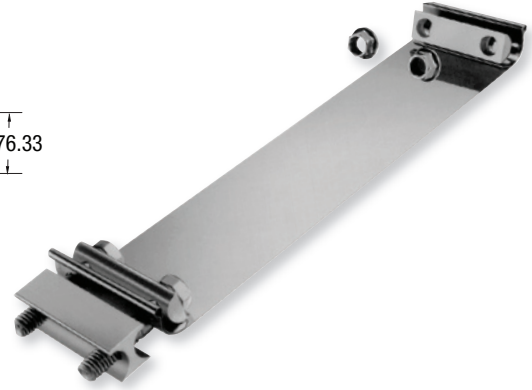


EASYSEAL		Nominal Joint Diameter	
Brand PN	Global PN	inches	mm
E20ST	0368 0000 051	2	50.8
E22ST	0368 0000 056	2 1/4	57.2
E25ST	0368 0000 064	2 1/2	63.5
E27ST	0368 0000 069	2 3/4	69.9
E30ST	0368 0000 076	3	76.2
E35ST	0368 0000 089	3 1/2	88.9
E40ST	0368 0000 102	4	101.6
E45ST	0368 0000 114	4 1/2	114.3
E50ST	0368 0000 127	5	127.0
E60ST	0368 0000 152	6	152.4
E70ST	0368 0000 178	7	177.8
E80ST	0368 0000 203	8	203.2

Note: Additional sizes are available to meet specific application requirements.

Installation Instructions:

1.



Center clamp around the joint.

2.



Insert bolts through the clamp end and force bar and install nuts.

3.



Tighten clamp from either side.
Torque to 48-60 ft.-lbs. (65-80 Nm).