





Light Duty V-Insert Clamp

V-Insert Clamp for dairy equipment, diesel engines, and swimming pool equipment.

Installation Torque 25 in.-lbs. | Welded Band Construction | Corrosion-Resistant Steel | Nominal Diameter Range 2" – 5.50"

LIGHT-DUTY V-INSERT
Worm-Drive Closure
Three Welded Inserts
300-Series SS Band and Insert

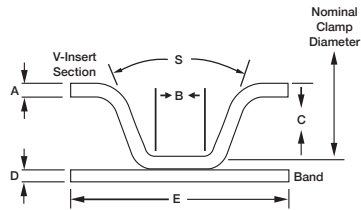

LIGHTDUTY V-INSERT CLAMP		Nominal Diameter (Ø)		Screw Type	Insert Angle (S)	Insert Thickness (A)		Insert Apex Width (B)		Insert Depth (C)		Band Thickness (D)		Band Width (E)	
Brand PN	Global PN	in	mm			in	mm	in	mm	in	mm	in	mm	in	mm
000540-001	0373 0001 051**	2.00	50.8	Thumb Wing	40°	0.050	1	0.262	6.65	0.141	3.58	0.026	0.66	0.530	13.46
000555-001	0373 0002 051	2.00	50.8	Hex-Head	40°	0.060	2	0.262	6.65	0.218	5.54	0.026	0.66	0.500	12.70
000555-01S	0373 0001 053	2.08	52.8	Hex-Head	40°	0.050	1	0.262	6.65	0.141	3.58	0.026	0.66	0.500	12.70
000540-002	0373 0001 067**	2.62	66.6	Thumb Wing	40°	0.050	1	0.262	6.65	0.141	3.58	0.026	0.66	0.530	13.46
000555-002	0373 0002 067	2.62	66.6	Hex-Head	40°	0.060	2	0.262	6.65	0.218	5.54	0.026	0.66	0.500	12.70
000555-02S	0373 0003 067	2.62	66.6	Hex-Head	40°	0.050	1	0.262	6.65	0.141	3.58	0.026	0.66	0.500	12.70
002347	0373 0001 073	2.88	73.2	Hex-Head	40°	0.050	1	0.210	5.33	0.276	7.01	0.025	0.64	0.500	12.70
000607	0373 0001 076	3.00	76.2	Hex-Head	40°	0.025	1	0.143	3.63	0.151	3.84	0.026	0.66	0.500	12.70
002337	0373 0001 078	3.06	77.7	Hex-Head	40°	0.050	1	0.265	6.73	0.348	8.84	0.023	0.58	0.500	12.70
000540-003	0373 0001 080**	3.15	80.0	Thumb Wing	40°	0.050	1	0.262	6.65	0.141	3.58	0.026	0.66	0.530	13.46
000555-003	0373 0002 080	3.15	80.0	Hex-Head	40°	0.060	2	0.262	6.65	0.218	5.54	0.026	0.66	0.500	12.70
000555-03S	0373 0003 080	3.15	80.0	Hex-Head	40°	0.050	1	0.262	6.65	0.141	3.58	0.026	0.66	0.500	12.70
000607-001	0373 0002 090	3.54	89.9	Hex-Head	60°	0.025	1	0.143	3.63	0.151	3.84	0.026	0.66	0.500	12.70
000551-001	0373 0001 090	3.56	90.4	Hex-Head	40°	0.035	1	0.156	3.96	0.218	5.54	0.025	0.64	0.500	12.70
000540-004	0373 0001 093**	3.67	93.2	Thumb Wing	40°	0.050	1	0.262	6.65	0.141	3.58	0.026	0.66	0.530	13.46
000555-004	0373 0002 093	3.67	93.2	Hex-Head	40°	0.060	2	0.262	6.65	0.218	5.54	0.026	0.66	0.500	12.70
000555-04S	0373 0000 093	3.67	93.2	Hex-Head	40°	0.050	1	0.262	6.65	0.141	3.58	0.026	0.66	0.500	12.70
002337-001	0373 0001 095	3.75	95.3	Hex-Head	40°	0.050	1	0.265	6.73	0.348	8.84	0.023	0.58	0.500	12.70
000555-005	0373 0001 107	4.21	106.9	Hex-Head	40°	0.060	2	0.262	6.65	0.218	5.54	0.026	0.66	0.500	12.70
000555-16S	0373 0002 121	4.75	120.7	Hex-Head	40°	0.035	1	0.262	6.65	0.141	3.58	0.026	0.66	0.500	12.70
000540-005	0373 0001 121**	4.78	121.4	Thumb Wing	40°	0.050	1	0.262	6.65	0.141	3.58	0.026	0.66	0.530	13.46
000555-13S	0373 0001 140	5.50	139.70	Hex-Head	40°	0.050	1	0.262	6.65	0.141	3.58	0.026	0.66	0.500	12.70

Note: Call for a complete list of sizes and materials.
**410 stainless steel screw