

Roll Formed V-Clamp





Has a continuous V-retainer and partial outer band, compact profile to fit flanges having limited clearance.

Continuously Formed with Partial Outer-Band | For Turbochargers and Exhausts | Diameter Range 4.53" – 18.88"

ROLL FORMED V-CLAMP

300-Series SS Partial Outer Band
300-Series SS Continuous V-Retainer
Corrosion and Heat-Resistant Steels

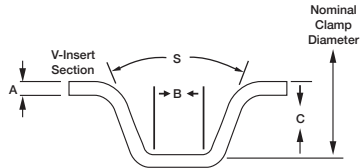

ROLL FORMED V-INSERT CLAMP		Nominal Diameter (Ø)		Installation Torque	Insert Angle (S)	Insert Thickness (A)		Insert Apex Width (B)		Insert Depth (C)	
Brand PN	Global PN	in	mm			in	mm	in	mm	in	mm
001114	0373 0602 115	4.53	115.1	75 in.-lb.	38°	0.069	1.75	0.262	6.65	0.141	3.58
001107-001	0373 0601 115	4.53	115.1	75 in.-lb.	38°	0.050	1.27	0.262	6.65	0.141	3.58
001107	0373 0602 130	5.12	130.1	75 in.-lb.	38°	0.050	1.27	0.262	6.65	0.141	3.58
001106	0373 0601 130	5.12	130.1	75 in.-lb.	40°	0.069	1.75	0.286	7.26	0.144	3.64
001071-005	0373 0602 142	5.59	142.0	120 in.-lb.	40°	0.050	1.27	0.262	6.65	0.141	3.58
001107-003	0373 0605 142	5.59	142.0	75 in.-lb.	38°	0.050	1.27	0.262	6.65	0.141	3.58
001096	0373 0001 143	5.62	142.8	35 in.-lb.	40°	0.040	1.02	0.169	4.29	0.174	4.42
001129	0373 0601 148	5.83	148.1	75 in.-lb.	38°	0.069	1.75	0.262	6.65	0.144	3.64
001111-001	0373 0602 171	6.73	170.9	75 in.-lb.	38°	0.069	1.75	0.207	5.26	0.172	4.38
001111	0373 0601 171	6.73	171.0	75 in.-lb.	38°	0.069	1.75	0.207	5.26	0.172	4.38
001107-005	0373 0602 177	6.97	177.0	75 in.-lb.	38°	0.050	1.27	0.262	6.65	0.141	3.58
001102-009	0373 0602 197	7.75	196.9	150 in.-lb.	38°	0.069	1.75	0.262	6.65	0.141	3.58
001107-006	0373 0601 199	7.83	198.9	75 in.-lb.	38°	0.050	1.27	0.262	6.65	0.141	3.58
001071-006	0373 0602 204	8.03	204.0	120 in.-lb.	40°	0.050	1.27	0.262	6.65	0.141	3.58
001108-001	0373 0603 204	8.03	204.0	75 in.-lb.	38°	0.069	1.75	0.262	6.65	0.157	3.99
001126	0373 0101 246	9.69	246.1	75 in.-lb.	38°	0.069	1.75	0.257	6.53	0.200	5.08
001108	0373 0601 246	9.69	246.1	75 in.-lb.	38°	0.069	1.75	0.262	6.65	0.157	3.99
001112	0373 0601 294	11.58	294.1	105 in.-lb.	37°	0.120	3.05	0.362	9.19	0.349	8.85
03730000316	0373 0000 316	12.42	315.5	221 in.-lb.	40°	0.115	2.92	0.370	9.4	0.320	8.13
100178	0373 0601 480	18.88	479.6	120 in.-lb.	26°	0.090	2.29	0.437	11.09	0.380	9.65

Note: Call for a complete list of sizes and materials.

