

V-Band Clamp



High-quality V-inserts welded to a band clamp with full round edges.



0.63", 0.88" or 0.75" Band Widths | Three-Inserts | 40° Insert Angle | Corrosion Resistant Steels | Nominal Diameter Range 1.75" – 10.69"

GENERAL PURPOSE V-CLAMP

0.25" or 5/16" Hardware
0.63", 0.88" and 0.75" Band Widths
Corrosion Resistant Steel

QUICK RELEASE V-CLAMP

0.25" Hardware
0.63", 0.88" and 0.75" Band Widths
Plastic Knob with Brass Insert or Nut

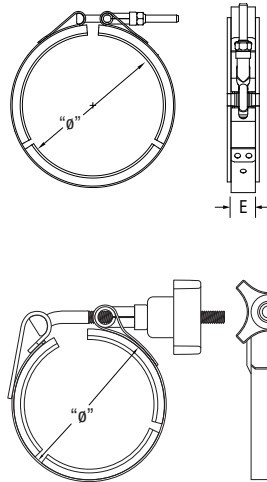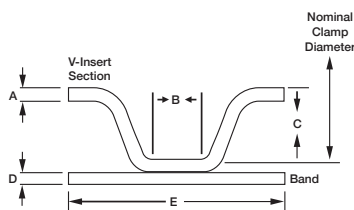

General Purpose



Quick Release

GENERAL PURPOSE V-CLAMP		Nominal Diameter (Ø)		Insert Thickness (A)		Insert Apex Width (B)		Insert Depth (C)		Band Thickness (D)		Band Width (E)	
Brand PN	Global PN	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
2026-1	0373 0001 044	1.75	44.5	0.050	1.27	0.262	6.65	0.141	3.58	0.025	0.63	0.625	15.87
2000-4	0373 0004 080	3.15	80.0	0.050	1.27	0.262	6.65	0.141	3.58	0.035	0.88	0.750	19.05
2017	0373 0004 082	3.21	81.5	0.050	1.27	0.262	6.65	0.141	3.58	0.035	0.88	0.750	19.05
2013-4	0373 0001 086	3.38	85.9	0.077	1.95	0.207	5.25	0.281	7.13	0.040	1.01	0.875	22.22
2013-1	0373 0013 097	3.82	97.0	0.077	1.95	0.207	5.25	0.281	7.13	0.040	1.01	0.875	22.22
3002-1	0373 0012 097	3.82	97.0	0.077	1.95	0.207	5.25	0.281	7.13	0.050	1.27	0.875	22.22
2002-1	0373 0003 099	3.88	98.6	0.050	1.27	0.400	10.16	0.281	7.13	0.040	1.01	0.875	22.22
3010-1	0373 0010 097	3.96	100.6	0.077	1.95	0.207	5.25	0.281	7.13	0.062	1.57	0.875	22.22
2000-20	0373 0000 103	4.04	102.6	0.050	1.27	0.262	6.65	0.141	3.58	0.035	0.88	0.750	19.05
2002-2	0373 0000 108	4.25	108.0	0.050	1.27	0.400	10.16	0.281	7.13	0.040	1.01	0.875	22.22
2013-5	0373 0001 109	4.31	109.5	0.077	1.95	0.207	5.25	0.281	7.13	0.040	1.01	0.875	22.22
2000-5	0373 0009 114	4.50	114.3	0.050	1.27	0.262	6.65	0.141	3.58	0.035	0.88	0.750	19.05
2001	0373 0009 117	4.61	117.1	0.050	1.27	0.156	3.96	0.281	7.13	0.035	0.88	0.750	19.05
2002-4	0373 0015 121	4.75	120.7	0.050	1.27	0.400	10.16	0.281	7.13	0.040	1.01	0.875	22.22
2013-3	0373 0003 122	4.81	122.2	0.077	1.95	0.207	5.25	0.281	7.13	0.040	1.01	0.875	22.22
2000-1	0373 0004 133	5.25	133.4	0.050	1.27	0.262	6.65	0.141	3.58	0.035	0.88	0.750	19.05
3014	0373 0006 148	5.81	147.6	0.050	1.27	0.207	5.25	0.281	7.13	0.062	1.57	0.875	22.22
2002-3	0373 0007 149	5.88	149.4	0.050	1.27	0.400	10.16	0.281	7.13	0.040	1.01	0.875	22.22
2000-11	0373 0004 150	5.90	149.9	0.050	1.27	0.262	6.65	0.141	3.58	0.035	0.88	0.750	19.05
2036-2	0373 0002 152	6.00	152.4	0.050	1.27	0.156	3.96	0.281	7.13	0.035	0.88	0.750	19.05
2022-1	0373 0002 243	9.56	242.8	0.050	1.27	0.530	13.46	0.215	5.46	0.035	0.88	0.750	19.05
2022-2	0373 0003 243	9.56	242.8	0.050	1.27	0.550	13.97	0.281	7.13	0.035	0.88	0.750	19.05
3026-2	0373 0001 271	10.69	271.5	0.050	1.27	0.207	5.25	0.281	7.13	0.062	1.57	0.875	22.22

QUICK RELEASE V-CLAMP		Nominal Diameter (Ø)		Insert Thickness (A)		Insert Apex Width (B)		Insert Depth (C)		Band Thickness (D)		Band Width (E)	
Brand PN	Global PN	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
20026-1 ⁽¹⁾	0373 0000 044 ⁽¹⁾	1.75	44.5	0.050	1.27	0.262	6.65	0.141	3.58	0.025	0.63	0.625	15.87
20000-1A ⁽²⁾	0373 0000 053 ⁽²⁾	2.08	52.8	0.050	1.27	0.262	6.65	0.141	3.58	0.025	0.63	0.750	19.05
20060-3 ⁽³⁾	0373 0004 078 ⁽³⁾	3.09	78.5	0.060	1.52	0.207	5.25	0.281	7.13	0.040	1.01	0.750	19.05
20000-3A ⁽⁴⁾	0373 0000 080 ⁽⁴⁾	3.15	80.0	0.050	1.27	0.262	6.65	0.141	3.58	0.025	0.63	0.750	19.05
20000-4A ⁽⁴⁾	0373 0003 093 ⁽⁴⁾	3.67	93.2	0.050	1.27	0.262	6.65	0.141	3.58	0.025	0.63	0.750	19.05
20065-1N ⁽⁶⁾	0373 0008 117 ⁽⁶⁾	4.62	117.4	0.050	1.27	0.210	5.33	0.281	7.13	0.025	0.63	0.750	19.05
20039-2E ⁽⁴⁾	0373 0001 127 ⁽⁴⁾	5.00	127.0	0.060	1.52	0.415	10.54	0.281	7.13	0.040	1.01	0.875	22.22
20036-3 ⁽⁵⁾	0373 0002 144 ⁽⁵⁾	5.65	143.5	0.050	1.27	0.262	6.65	0.141	3.58	0.025	0.63	0.625	15.87
20004-1HD ⁽⁴⁾	0373 0005 148 ⁽⁴⁾	5.81	147.6	0.077	1.95	0.207	5.25	0.281	7.13	0.040	1.01	0.875	22.22
20022-1 ⁽³⁾	0373 0007 150 ⁽³⁾	5.92	150.4	0.050	1.27	0.400	10.16	0.281	7.13	0.025	0.63	0.750	19.05
20023-1 ⁽³⁾	0373 0000 243 ⁽³⁾	9.56	242.8	0.050	1.27	0.530	13.46	0.215	5.46	0.035	0.88	0.750	19.05

Note: Call for a complete list of sizes and materials.

¹ 300-Series SS Bent T-Bolt ² Electropolished, 300-Series SS Bent T-Bolt ³ 300-Series SS T-Bolt ⁴ Electropolished, 300-Series SS T-Bolt ⁵ 300-Series SS Hardware
⁶ No T-Bolt, must purchase separately

