

Barrel Band Clamp




Heavy-duty, low-profile barrel-style hose clamp for automotive, commercial and industrial applications.

0.75" Band Width | CRS, Zinc-Plated Hardware | M6 Barrel Nut and Trunion | Diameter Range 1.06"– 6.19"

BARREL BAND CLAMP

M6 Barrel Nut and Trunion
0.75" Band Width
CRS, Zinc-Plated Hardware

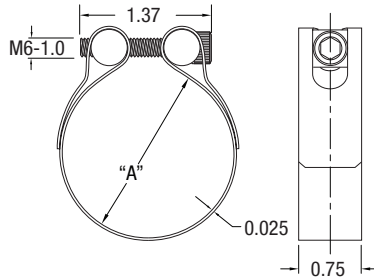

Nominal Diameter		BARREL BAND CLAMP		inches (A)		mm	
inches	mm	Brand PN	Global PN	min	max	min	max
1.06	27	27-49M	0363 0002 027	1.06	1.19	26.92	30.23
1.13	29	27-50M	0363 0000 029	1.13	1.25	28.45	31.75
1.25	32	27-51M	0363 0001 030	1.19	1.31	30.23	33.78
1.31	33	27-52M	0363 0003 032	1.25	1.38	31.75	35.31
1.31	33	27-53M	0363 0005 033	1.31	1.44	33.27	36.83
1.38	35	27-54M	0363 0005 035	1.38	1.50	35.05	38.61
1.44	37	27-55M	0363 0007 037	1.44	1.56	36.58	40.13
1.50	38	27-56M	0363 0007 038	1.50	1.63	38.10	41.66
1.56	40	27-57M	0363 0006 040	1.56	1.69	39.62	43.18
1.63	41	27-58M	0363 0006 041	1.63	1.88	41.40	47.75
1.69	43	27-59M	0363 0008 044	1.69	1.94	42.93	49.28
1.75	44	27-60M	0363 0008 046	1.75	2.00	44.45	50.80
1.81	46	27-61M	0363 0005 048	1.81	2.06	45.97	52.32
1.88	48	27-62M	0363 0003 050	1.88	2.13	47.75	54.10
1.94	49	27-63M	0363 0005 051	1.94	2.19	49.28	55.63
2.00	51	27-64M	0363 0004 052	2.00	2.25	50.80	57.15
2.06	52	27-65M	0363 0003 054	2.06	2.31	52.32	58.67
2.13	54	27-66M	0363 0002 054	2.13	2.38	54.10	60.45
2.19	56	27-67M	0363 0005 057	2.19	2.50	55.63	63.50
2.25	57	27-68M	0363 0004 059	2.25	2.56	57.15	65.02
2.38	60	27-69M	0363 0003 061	2.31	2.63	58.67	66.55
2.38	61	27-70M	0363 0025 064	2.38	2.69	60.45	68.33
2.44	62	27-71M	0363 0011 064	2.44	2.75	61.98	69.85
2.50	64	27-72M	0363 0001 066	2.50	2.81	63.50	71.37
2.56	65	27-73M	0363 0005 067	2.56	2.88	65.02	72.90
2.69	68	27-74M	0363 0002 069	2.63	2.94	66.80	74.68
2.69	69	27-75M	0363 0003 071	2.69	3.00	68.33	76.20
2.75	70	27-76M	0363 0003 072	2.75	3.06	69.85	77.72
2.88	73	27-77M	0363 0000 074	2.81	3.13	71.37	79.25
2.94	75	27-78M	0363 0001 075	2.88	3.19	73.15	81.03

Nominal Diameter		BARREL BAND CLAMP		inches (A)		mm	
inches	mm	Brand PN	Global PN	min	max	min	max
3.00	77	27-79M	0363 0009 077	2.94	3.25	74.68	82.55
3.00	78	27-80M	0363 0005 079	3.00	3.31	76.20	84.07
3.13	80	27-81M	0363 0015 082	3.06	3.38	77.72	85.60
3.25	82	27-82M	0363 0010 082	3.13	3.44	79.50	87.38
3.25	83	27-83M	0363 0011 085	3.19	3.50	81.03	88.90
3.31	85	27-84M	0363 0005 085	3.25	3.56	82.55	90.42
3.38	86	27-85M	0363 0006 086	3.31	3.63	84.07	92.20
3.44	88	27-86M	0363 0000 088	3.38	3.69	85.85	93.73
3.50	90	27-87M	0363 0008 090	3.44	3.75	87.38	95.25
3.56	91	27-88M	0363 0003 091	3.50	3.81	88.90	96.77
3.69	93	27-89M	0363 0003 093	3.56	3.88	90.42	98.55
3.69	94	27-90M	0363 0005 094	3.63	3.94	92.20	100.08
3.75	96	27-91M	0363 0010 096	3.69	4.00	93.73	101.60
3.88	98	27-92M	0363 0008 098	3.75	4.06	95.25	103.12
3.88	99	27-93M	0363 0005 099	3.81	4.13	96.77	104.65
4.00	101	27-94M	0363 0016 102	3.88	4.19	98.55	106.43
4.06	103	27-95M	0363 0007 102	3.94	4.25	100.08	107.95
4.13	104	27-96M	0363 0007 104	4.00	4.19	101.60	106.17
4.13	105	27-97M	0363 0000 105	4.06	4.25	103.12	107.70
4.19	107	27-98M	0363 0012 107	4.13	4.31	104.65	109.22
4.25	108	27-99M	0363 0012 109	4.19	4.38	106.43	111.00
4.31	110	27-100M	0363 0014 110	4.25	4.44	107.95	112.52
4.63	117	27-104M	0363 0008 117	4.50	4.69	114.30	118.87
4.81	123	27-108M	0363 0005 123	4.75	4.94	120.65	125.22
5.06	129	27-112M	0363 0005 129	5.00	5.19	127.00	131.57
5.38	136	27-116M	0363 0004 136	5.25	5.44	133.35	137.92
5.63	142	27-120M	0363 0002 142	5.50	5.69	139.70	144.27
5.81	148	27-124M	0363 0001 148	5.75	5.94	146.05	150.62
6.13	155	27-128M	0363 0002 155	6.00	6.19	152.40	156.97

Note: Call for a complete list of sizes and materials and to discuss unique requirements.