

Flex Roll Formed V-Clamp





Flex-Roll-Formed V-Clamp designed for pumps and swimming pool filtration systems.

7/8" Band Width | Partial Outer Band Welded to Two V-Retainers | Added Flexible Band Segment | 28° Insert Angle | Nominal Diameter 21 1/8"

FLEX ROLL FORMED V-CLAMP

1/4", 5/16" and 3/8" Fasteners
7/8" Band Width in 300-Series SS
Two 300-Series SS Inserts

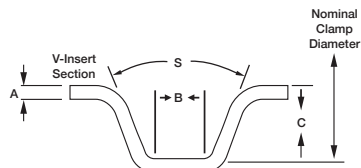

FLEX ROLL FORMED V-CLAMP		Nominal Diameter (Ø)		Installation Torque	Insert Angle (S)	Insert Thickness (A)		Insert Apex Width (B)		Insert Depth (C)	
Brand PN	Global PN	in	mm			in	mm	in	mm	in	mm
100198	0373 0101 537	21.61	536.7	75 in.-lb.	28°	0.100	2.50	1.380	35.10	0.460	11.70
100198-00	0373 0000 549	21.61	536.7	75 in.-lb.	28°	0.100	2.50	1.380	35.10	0.460	11.70

Note: Call for a complete list of sizes and materials.

Uni-Flex V-Clamp





Cost-effective mounting solution for turbochargers and diesel exhaust connections.

Continuously Formed Band Having Two 180° V-Retainers | Added Hinge Point for Flexibility | 40 Degree Insert Angle | Diameter Range 4.19" – 5.88"

UNI-FLEX V-CLAMP

1/4" or M6 Fasteners
300-Series SS Band and Insert
Corrosion-Resistant Steels

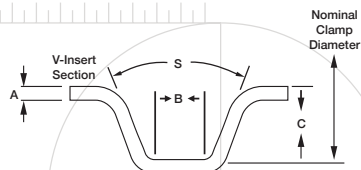

UNI-FLEX V-CLAMP		Nominal Diameter (Ø)		Installation Torque	Insert Angle (S)	Insert Thickness (A)		Insert Apex Width (B)		Insert Depth (C)	
Brand PN	Global PN	in	mm			in	mm	in	mm	in	mm
001123	0373 0501 106	4.19	106.4	75 in.-lb.	40°	0.050	1.27	0.245	6.22	0.229	5.81
001010-007	0373 0500 149	5.88	149.4	75 in.-lb.	40°	0.050	1.27	0.400	10.16	0.281	7.13

Note: Call for a complete list of sizes and materials.