

Flex Roll Formed V-Clamp





Flex-Roll-Formed V-Clamp designed for pumps and swimming pool filtration systems.

7/8" Band Width | Partial Outer Band Welded to Two V-Retainers | Added Flexible Band Segment | 28-Degree Insert Angle | Nominal Diameter 21 1/8"

FLEX ROLL FORMED V-CLAMP

1/4", 5/16" and 3/8" Fasteners
7/8" Band Width in 300-Series SS
Two 300-Series SS Inserts

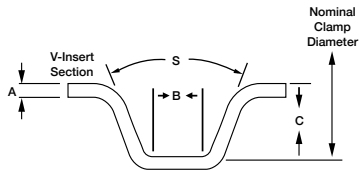

| FLEX ROLL FORMED V-CLAMP | | Nominal Diameter (Ø) | | Installation Torque | Insert Angle (S) | Insert Thickness (A) | | Insert Apex Width (B) | | Insert Depth (C) | |
|--------------------------|---------------|----------------------|-------|---------------------|------------------|----------------------|------|-----------------------|-------|------------------|-------|
| Brand PN | Global PN | in | mm | | | in | mm | in | mm | in | mm |
| 100198 | 0373 0101 537 | 21.61 | 536.7 | 75 in.-lb. | 28° | 0.100 | 2.50 | 1.380 | 35.10 | 0.460 | 11.70 |
| 100198-00 | 0373 0000 549 | 21.61 | 536.7 | 75 in.-lb. | 28° | 0.100 | 2.50 | 1.380 | 35.10 | 0.460 | 11.70 |

Note: Call for a complete list of sizes and materials.

Uni-Flex V-Clamp





Cost-effective mounting solution for turbochargers and diesel exhaust connections.

Continuously Formed Band Having Two 180° V-Retainers | Added Hinge Point for Flexibility | 40-Degree Insert Angle | Diameter Range 4.19" – 5.88"

UNI-FLEX V-CLAMP

1/4" or M6 Fasteners
300-Series SS Band and Insert
Corrosion-Resistant Steels

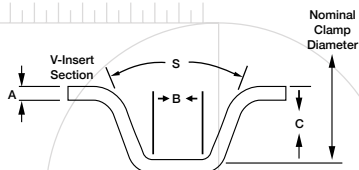

| UNI-FLEX V-CLAMP | | Nominal Diameter (Ø) | | Installation Torque | Insert Angle (S) | Insert Thickness (A) | | Insert Apex Width (B) | | Insert Depth (C) | |
|------------------|---------------|----------------------|-------|---------------------|------------------|----------------------|------|-----------------------|-------|------------------|------|
| Brand PN | Global PN | in | mm | | | in | mm | in | mm | in | mm |
| 001123 | 0373 0501 106 | 4.19 | 106.4 | 75 in.-lb. | 40° | 0.050 | 1.27 | 0.245 | 6.22 | 0.229 | 5.81 |
| 001010-007 | 0373 0500 149 | 5.88 | 149.4 | 75 in.-lb. | 40° | 0.050 | 1.27 | 0.400 | 10.16 | 0.281 | 7.13 |

Note: Call for a complete list of sizes and materials.